

ONEFIVE AEROPULSE FS60

High power femtosecond fiber laser



HIGH PERFORMANCE AND RUGGED ULTRAFAST FIBER LASER

Industrial-grade femtosecond fiber laser

The aeroPULSE FS60 is our new industrial-grade femtosecond fiber laser based on our world-leading photonic crystal fiber platform.

Developed for both demanding 24/7 OEM and academic applications, the aeroPULSE FS60 delivers high unit-to-unit consistency and up-time, low cost of ownership, and ease of integration.

Applications

- Thin film cutting
- Glass cutting
- Stent manufacture
- Medical device fabrication
- IC package cutting
- Scribing
- OPA Pumping
- Femtosecond materials processing

ONEFIVE AEROPULSE FS60

Ultra-short femtosecond pulses

This high performance and rugged OEM fiber laser utilize state-of-the-art mode-locking technology to deliver ultra-short femtosecond pulses with outstanding long-term stability, superior pulse-to-pulse stability, low noise, and excellent beam pointing stability.

Developed for cutting edge applications

The aeroPULSE FS60 is designed for a diverse range of applications including thin film cutting, glass cutting, stent, and other medical devices, IC package cutting, scribing, OPA pumping and material processing.

With the introduction of programmable amplifier burst control, higher ablation rates or depths can be achieved over non-burst processing for many applications. This new feature allows for full process optimization.

As standard, the aeroPULSE FS60 is available with output powers up to 60 W at 1030 nm. With tuneable pulse duration and a high range of repetition rates, the aeroPULSE FS60 is a flexible, cost-effective femtosecond laser.

Get the dual wavelength second-harmonic module

The attachable second-harmonic generation (SHG) module makes it possible to switch between 20 μ J at 515 nm and 40 μ J at 1030 nm. The wavelength is selected via software.

Maintenance-free and OEM-ready

Utilising NKT Photonics propriety optoCAGE™ technology results in no alignment for ultimate reliability. The aeroPULSE FS60 guarantees high stability with 24/7 operation and is ideal for OEM integration.

The system configuration consists of a 19" rack-mountable control unit and a remote laser head. The complete system is water-cooled supporting the high output power performance.

Features

- Average power >60W @1030nm
- Average pulse energy >40 μ J @1030nm
- Average power >30W @515nm w/ SHG
- Average pulse energy >20 μ J @515nm w/ SHG
- Available pulse widths <500 - 3 ps
- Up to 50 MHz repetition rate
- Excellent beam pointing stability
- Programmable amplifier burst control
- Based on world leading photonic crystal fiber technology
- Designed for industrial reliability
- System monitoring via remote diagnostics
- Plug and Play
- Maintenance-free 24/7 operation
- Attachable second harmonic module


Support and warranty

The product is covered by a comprehensive warranty. Service options are available. For details, please enquire.

All aeroPULSE lasers are completely maintenance-free and has an expected lifetime of more than 20,000 hours.

PERFORMANCE

Typical output power vs repetition rate

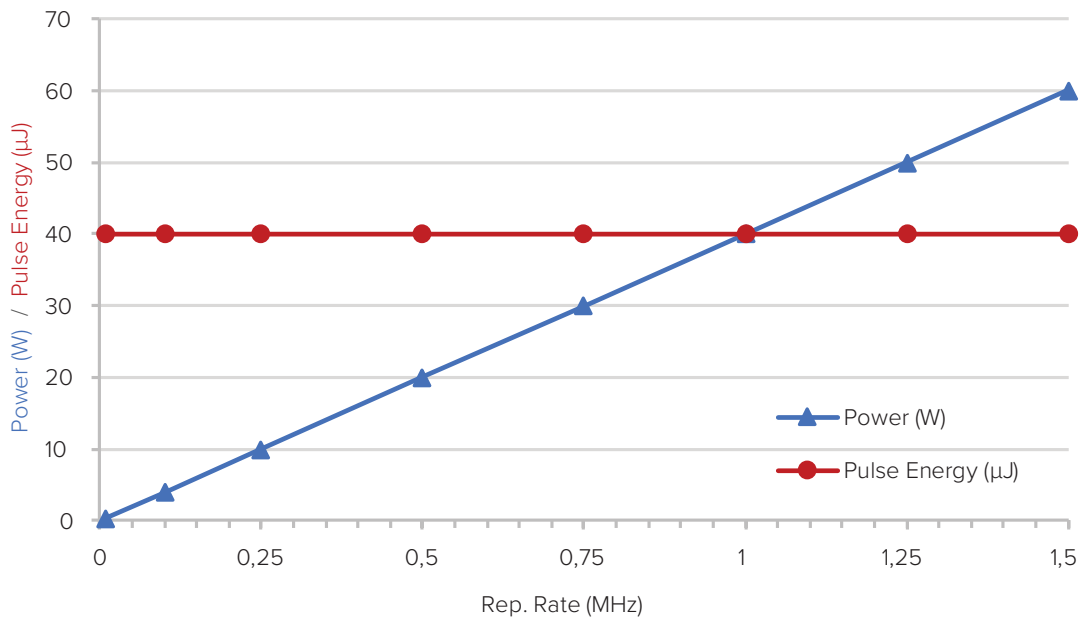

SPECIFICATIONS

Optical


Model	FS60	With dual wavelength module
		SHG
Center wavelength [nm]	1030 ± 5	515 ± 2
Power [W]	> 60	> 30
Pulse duration [fs]	< 500 – 3000	< 500
Pulse energy [μJ]	> 40 (up to 1.5 MHz)	> 20 (up to 1.5 MHz)
Repetition rate [MHz]	1.0 – 50	1.0 – 50
Repetition rate with output AOM [MHz]	S.S. – 1.5	S.S. – 1.5
Beam diameter [mm]	2.5 ± 0.5	2.0 ± 0.5
Beam divergence [mrad]	< 1	< 1
Spatial mode, fundamental	M ² ≤ 1.2	M ² ≤ 1.3
Beam asymmetry/ellipticity [%]	< 15	< 20
Power stability (8h), RMS [%]	< 0.5	< 0.5
Pointing stability (8 hours) [mrad]	< 50	< 50
Polarization - linear, PER [dB]	> 20	> 20

Mechanical/Electrical


Model	FS60	With dual wavelength module
		SHG
Computer interface	USB 2.0, RS-232, Ethernet	USB 2.0, RS-232, Ethernet
Operating voltage	100-240 VAC, 50-60 Hz	100-240 VAC, 50-60 Hz
Power consumption [W]	< 600	< 600
Operation temperature [°C]	15 – 35	15 – 35
Storage temperature [°C]	-20 – 60	-20 – 60
Laser head dimensions (LxHxW) [mm ³]	647.5 x 142 x 350	809.5 x 142 x 350
Laser head weight [kg]	35	39
Control unit dimensions (LxHxW) [mm ³]	442 x 168.5 x 374	442 x 168.5 x 374
Control unit weight [kg]	18.5	18.5
Umbilical length [m]	4	4
Chiller dimensions (WxHxL) [mm ³]	482 x 310 x 550	482 x 310 x 550
Chillerweight [kg]	40	40
Cooling	Water-based	Water-based

TECHNICAL DRAWINGS

Laser head

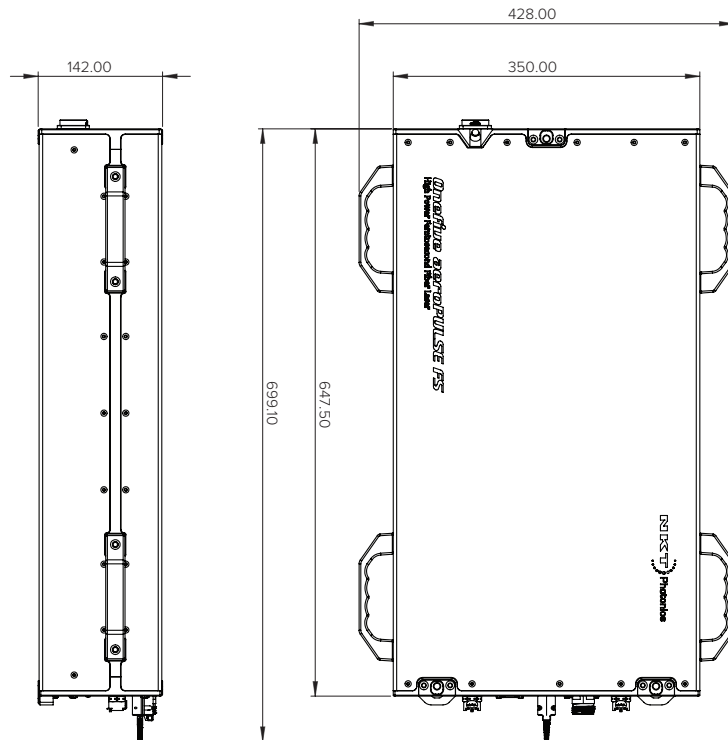


Laser head with SHG module

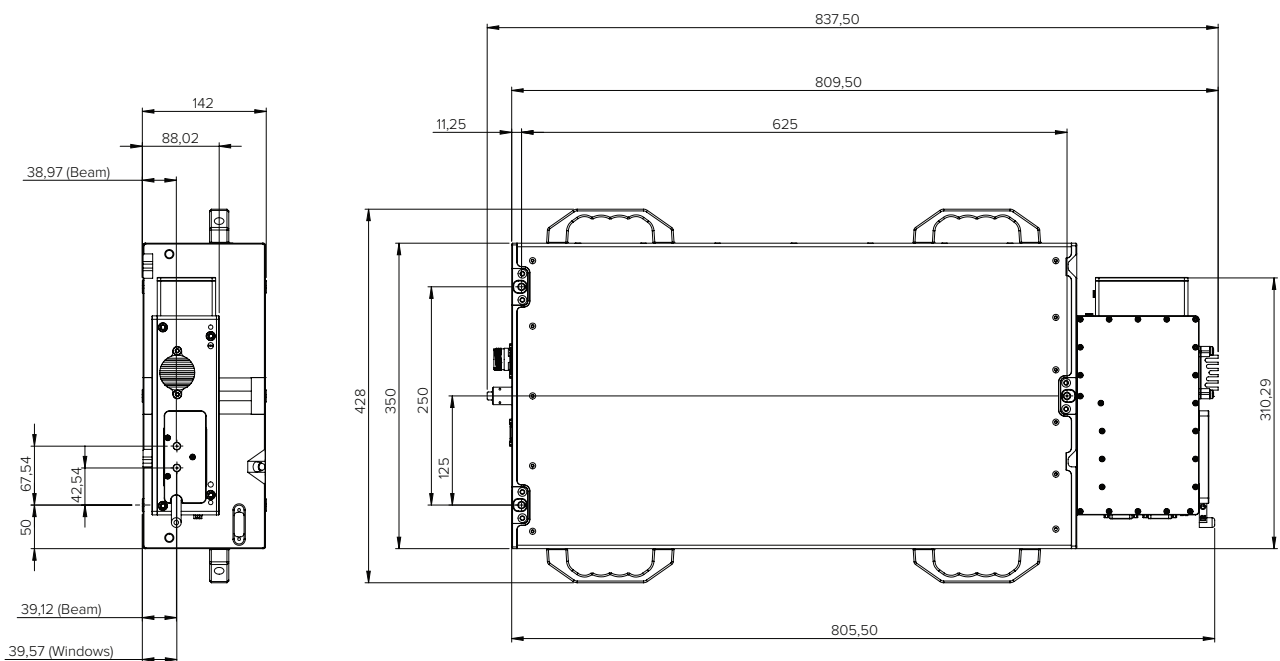

TECHNICAL DRAWINGS

Controller

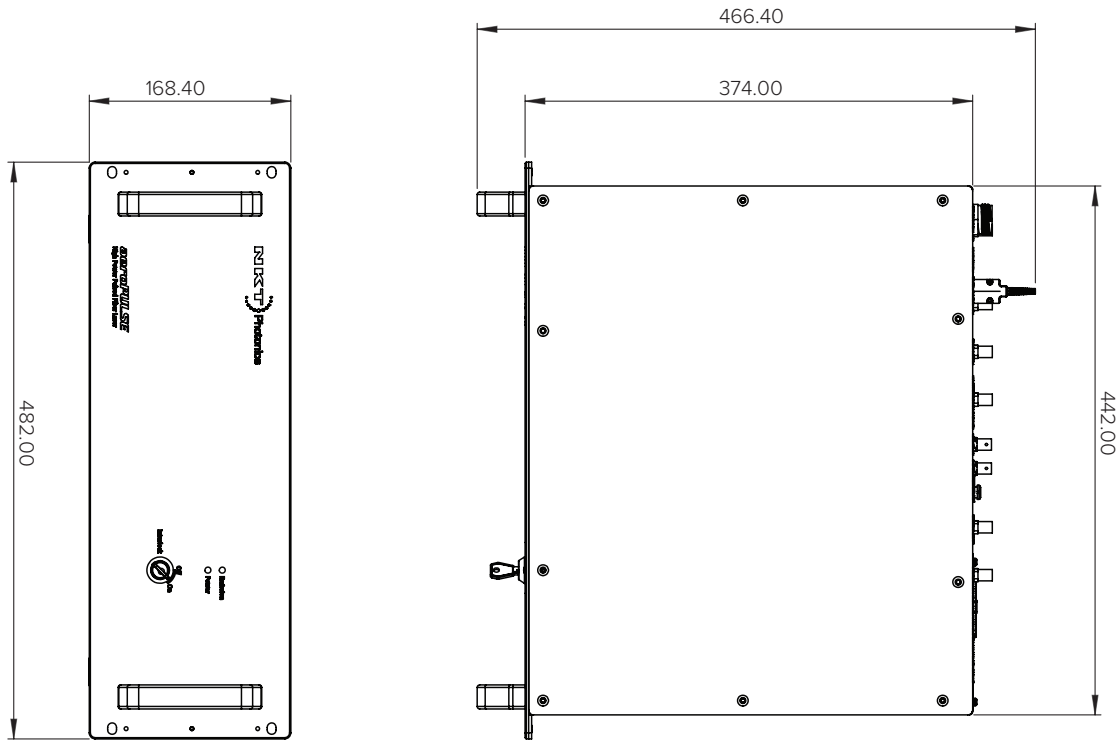

All aeroPULSE FS60 products are produced under our quality management system certified in accordance with the ISO 9001:2015.

