

# femtoTrain™

## Highest Peak Power Femtosecond Oscillator



femtoTrain is a family of compact, reliable and true turn-key fixed-wavelength femtosecond oscillator for medical, bio-imaging and other applications. The new femtoTrain 1040-5 offers short pulse widths below 220 fs and high average power of 5 W to deliver 2 MW of peak power. As a compact, reliable and true turn-key fixed-wavelength femtosecond laser, femtoTrain is ideal for medical and bio-imaging applications in general, and specifically for photoactivation in optogenetics.

femtoTrain is specifically designed for applications that require high pulse energy and peak power at a high repetition rate. This laser allows fast scanning or process speeds with a repetition rate of 10 MHz and pulse energy of up to >500 nJ. The femtoTrain platform is optimized for low noise and outstanding long-term stability and is the ideal laser source for sensitive bio-imaging and micro-surgery applications. The pulse is near-transform limited and thus does not need dispersion pre-compensation.

femtoTrain is developed, designed and manufactured with high reliability and quality in mind. The laser is equipped with long life diodes and features a sealed optical cavity, manufactured in a clean room production environment. The result is a dependable laser with long lifetime, high uptime and low cost of ownership. With direct diode pumping technology and an ultra-stable optical cavity design, femtoTrain offers easy-to-use and proven 24/7 operation.

### The femtoTrain Advantage

- High pulse energy (>500 nJ) at high repetition rate (10 MHz)
- Highest peak power (2 MW) in its class
- Compact and reliable, turn-key operation
- Proven, dependable performance in 24/7 operation

### Applications

- Optogenetics (photo-stimulation)
- Multiphoton imaging (YFP, RFP, SHG)
- Tissue dissection
- Micro-surgery



# femtoTrain Specifications<sup>1, 2</sup>


	femtoTrain 1040-3	femtoTrain 1040-5
Output Characteristics		
Average Power	>3.5 W	>5.0 W
Pulse Energy	>350 nJ	>500 nJ
Wavelength	1040 nm ±8 nm	
Repetition Rate	10 MHz	
Pulse Width (FWHM)	<370 fs	<220 fs
Peak Power	>830 kW	>2 MW
Power Stability	<1% rms (100 hours) <0.5% rms (12 hours)	
Beam Quality	TEM <sub>00</sub> , M <sup>2</sup> <1.1	
Beam Diameter, at waist	0.6 ±0.12 mm	
Beam Waist Position (relative to exit)	-155 mm ±100 mm	
Beam Divergence	2.2 ±0.4 mrad	
Polarization	100:1, horizontal	
Ellipticity	<10%	
Beam Height	2 in	
Cold Start Time	30 min	
Warm Start Time	15 min	
Operating Temperature Range	17–30°C	
Cooling Requirements		
Laser Head	Closed-loop chiller included	
Power Supply	Air cooled	
Utility Requirements		
Voltage	100–230 V, 50 Hz / 60 Hz	
Laser Head Physical Characteristics		
Dimensions (L x W x H)	21.33 x 8.97 x 4.52 in (542 x 228 x 115 mm)	
Weight	44 lbs (20 kg)	
Power Supply Physical Characteristics		
Dimensions (L x W x H)	19.29 x 7.87 x 3.54 in (490 x 200 x 90 mm)	
Weight	17 lbs (8 kg)	

1. Due to our continuous product improvement program, specifications are subject to change without notice.


2. femtoTrain is a Class IV – High-Power Laser, whose beam is, by definition, a safety and fire hazard. Take precautions to prevent exposure to direct and reflected beams. Diffuse as well as specular reflections can cause severe skin or eye damage.

# femtoTrain


Long-term Measurement >700 Hours<sup>1</sup> – femtoTrain

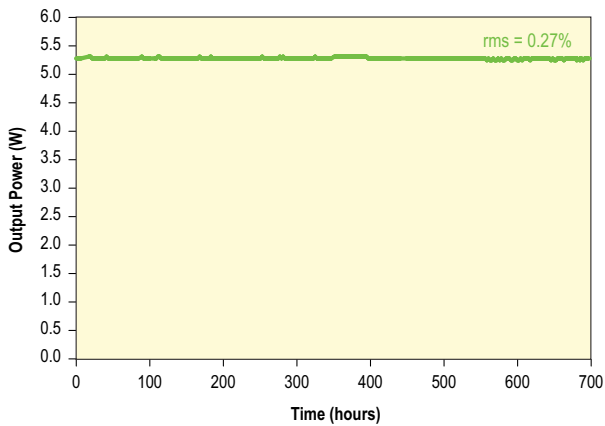

femtoTrain Beam Profile

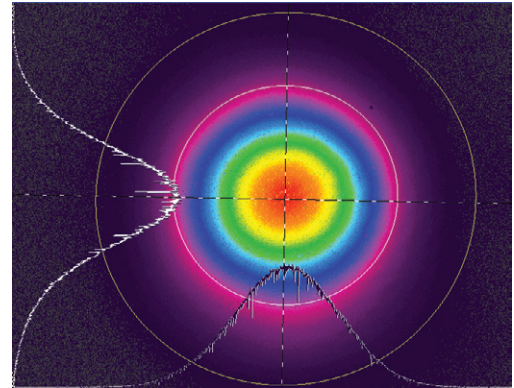

<sup>1</sup> Typically measured performance; not a guaranteed or warranted specification.

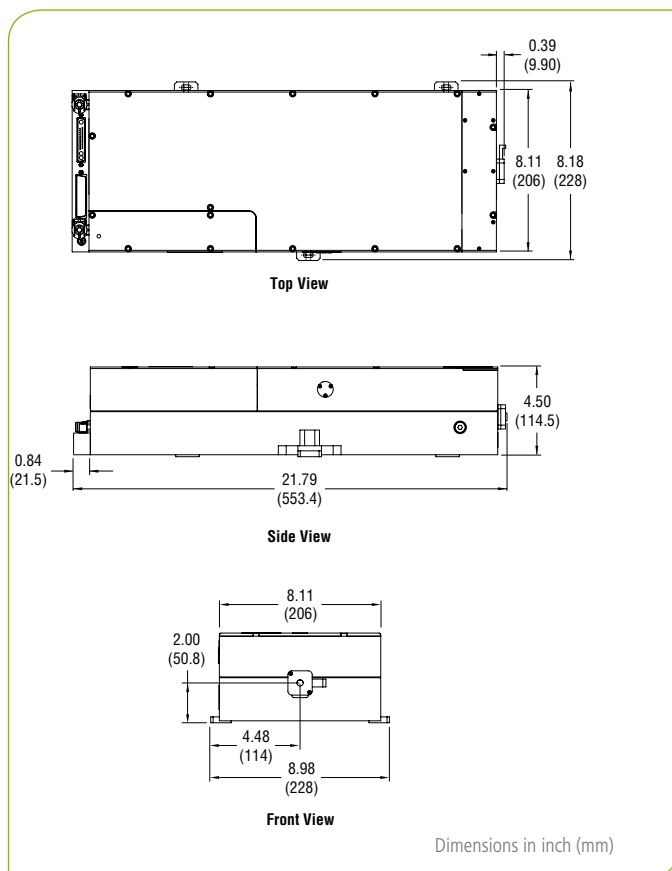

femtoTrain Dimensions



[www.spectra-physics.com](http://www.spectra-physics.com)

3635 Peterson Way, Santa Clara, CA 95054, USA

PHONE: 1-800-775-5273 1-408-980-4300 FAX: 1-408-980-6921 EMAIL: [sales@spectra-physics.com](mailto:sales@spectra-physics.com)

Belgium +32-(0)800-11 257  
China +86-10-6267-0065  
France +33-(0)1-60-91-68-68  
Germany / Austria / Switzerland +49-(0)6151-708-0  
Japan +81-3-3556-2705

[belgium@newport.com](mailto:belgium@newport.com)  
[info@spectra-physics.com.cn](mailto:info@spectra-physics.com.cn)  
[france@newport.com](mailto:france@newport.com)  
[germany@newport.com](mailto:germany@newport.com)  
[spectra-physics@splasers.co.jp](mailto:spectra-physics@splasers.co.jp)

Korea +82-31-8021-1600  
Netherlands +31-(0)30 6592111  
Singapore +65-6664-0040  
Taiwan +886-3-575-3040  
United Kingdom +44-1235-432-710

[korea@spectra-physics.com](mailto:korea@spectra-physics.com)  
[netherlands@newport.com](mailto:netherlands@newport.com)  
[sales.sg@newport.com](mailto:sales.sg@newport.com)  
[sales@newport.com.tw](mailto:sales@newport.com.tw)  
[uk@newport.com](mailto:uk@newport.com)