

波长&带宽可调谐滤波器 OTF-350

OTF-350是一款多功能手动光学可调谐滤波器，波长和带宽独立可调。独立的高精度自由空间场和精准的可调节机制可实现优异的光控制和顶部平坦的通带形状。





性能


- ▶ 波长可调谐范围: 80nm
- ▶ 波长范围: 1530-1610nm (C&L 波段)
1290-1330nm (O 波段)
- ▶ 带宽: 0.2-10.0nm (普通型号)
0.1-15.0nm (宽带型号)
- ▶ 波长及带宽独立可调
- ▶ 顶部平坦滤波整形

应用

- ▶ 40Gb/s, 100Gb/s 传输测试
- ▶ WDM 波长调谐
- ▶ ASE 噪声抑制
- ▶ 脉冲整形
- ▶ 下一代光束波长十字交叉连接

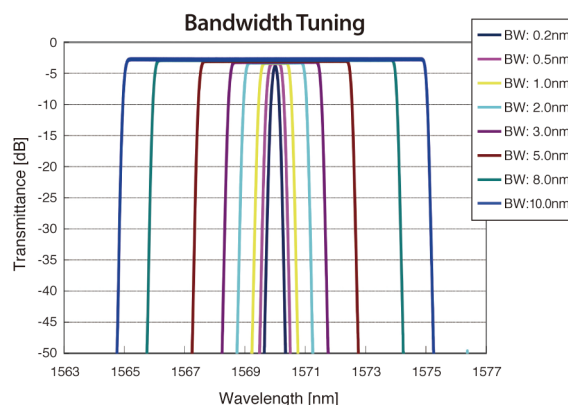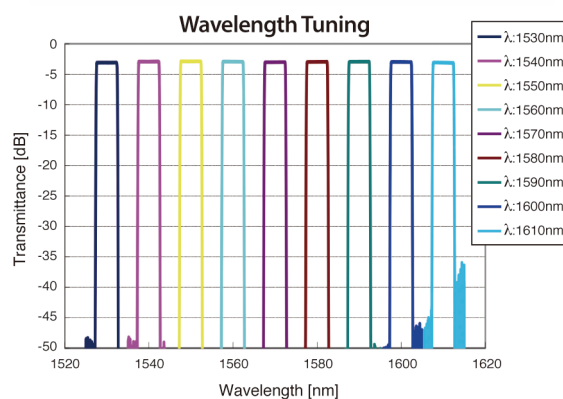

调谐机制

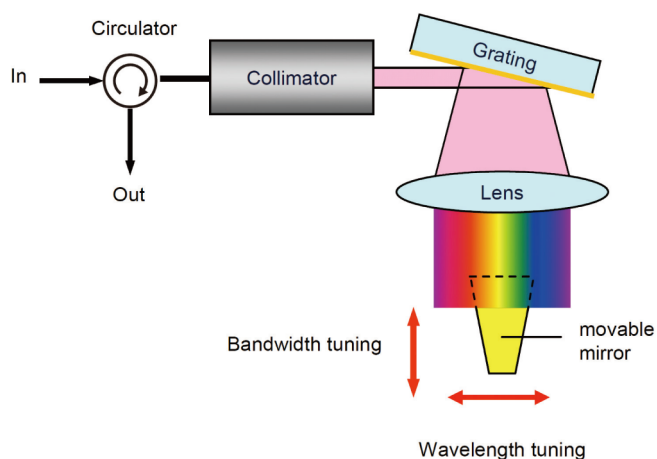

性能指标

Normal type: BW 0.2 - 10 nm


Category	Parameter	Unit	Specification	Notes
Wavelength Characteristics	Wavelength Range	nm	1530 - 1610	
	Tuning Range	nm	80	
Filter Characteristics	Bandwidth @-3 dB	nm	0.2 - 10.0	
	Bandwidth @-20 dB	nm	≤ 0.6	Bandwidth@-3 dB = 0.2 nm
			≤ 11	Bandwidth@-3 dB = 10.0 nm
	Group Velocity Dispersion	ps/nm	≤ ±1 (typ. ≤ ±0.2)	
Power Characteristics	Maximum Input Power	dBm	+25	
	Insertion Loss	dB	≤ 5 (typ. ≤ 3.5)	Bandwidth@-3 dB ≥ 0.5 nm
			≤ 7	Bandwidth@-3 dB < 0.5 nm
	Insertion Loss Uniformity (typ.)	dB	≤ 0.5	
	Return Loss	dB	≥ 40 (typ. ≥ 45)	
	Crosstalk (typ.)	dB	≥ 50	
	PDL (typ.)	dB	≤ 0.25	SMF
Fiber	Optical Fiber	-	SMF or PMF ^{*1}	
	Optical Connector	-	FC or SC	
	Optical Polish	-	SPC or APC	APC = Angled PC
Others	Dimensions (W) x (D) x (H)	mm	250 x 151 x 113	
	Weight	kg	3.5	

Wide type: BW 0.1 - 15 nm

Category	Parameter	Unit	Specification	Notes
Wavelength Characteristics	Wavelength Range	nm	1530 - 1610	
	Tuning Range	nm	80	
Filter Characteristics	Bandwidth @-3 dB	nm	0.1 to 15.0	
	Bandwidth @-20 dB	nm	≤ 0.4	Bandwidth@-3 dB = 0.1 nm
			≤ 15.5	Bandwidth@-3 dB = 15.0 nm
	Group Velocity Dispersion	ps/nm	≤ ±1 (typ. ≤ ±0.2)	
Power Characteristics	Maximum Input Power	dBm	+25	
	Insertion Loss	dB	≤ 5 (typ. ≤ 3.5)	Bandwidth@-3 dB ≥ 0.2 nm
			≤ 7	Bandwidth@-3 dB < 0.2 nm
	Insertion Loss Uniformity (typ.)	dB	≤ 0.5	
	Return Loss	dB	≥ 40 (typ. ≥ 45)	
	Crosstalk (typ.)	dB	≥ 50	
	PDL (typ.)	dB	≤ 0.25	SMF
Fiber	Optical Fiber	-	SMF or PMF ^{*1}	
	Optical Connector	-	FC or SC	
	Optical Polish	-	SPC or APC	APC = Angled PC
Others	Dimensions (W) x (D) x (H)	mm	250 x 151 x 113	
	Weight	kg	3.5	

*1: In case of PMF, Polarization extinction ratio 20 dB (typ.), Polarization axis in alignment with connector key.

设备选型

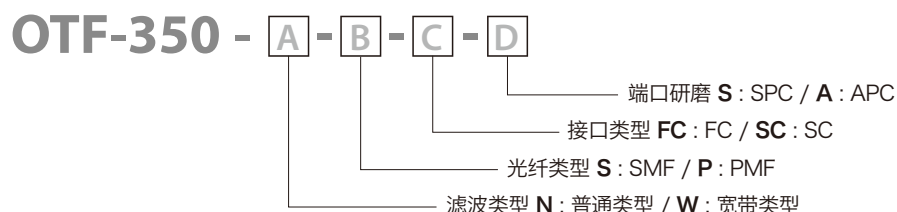

www.santec.com.cn

2021 © SANTEC CORPORATION Santec reserves the right to make changes in equipment design, components or specifications without notices.



SANTEC CORPORATION

5823 Ohkusa-Nenjozaka, Komaki, Aichi 485-0802, Japan Tel. +81-568-79-3536 Fax +81-568-79-1718

SANTEC USA CORPORATION

433 Hackensack Ave., Hackensack, NJ 07601, USA Toll Free +1-800-726-8321 (santec-1) Tel. +1-201-488-5505 Fax +1-201-488-7702

SANTEC EUROPE LIMITED

Grand Union Studios, 332 Ladbroke Grove, London W10 5AD, UK Tel. +44-20-3176-1550

圣德科(上海)光通信有限公司

上海市浦东新区张杨路838号华都大厦21楼H座 邮编: 200122 电话: 021-5836-1261 传真: 021-5836-1263