


**AOQS Specofications**  
**声光Q开关产品规格书**  
**Q0002-QL080-015-1064**

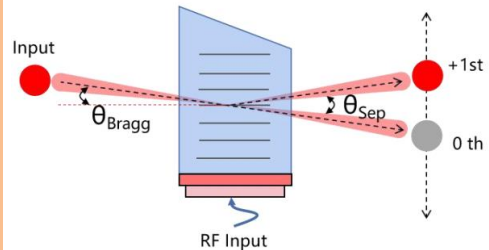

**1. SPECIFICATIONS (规格)**

Interaction material (介质材料)	Crystal quartz (石英)
Acoustic mode (声波模式)	Longitudinal (纵波)
Operating wavelength (工作波长)	1064nm
Polarization (光偏振)	Linear, perpendicular to base (线偏振, 垂直于基座)
Transmission (透过率)	> 99.6%
Active aperture (有效孔径)	1.5mm
Center frequency (Fc) (中心频率)	80MHz
Loss modulation (损耗调制)	>85%
RF power (射频功率)	25 W (max)
Input Impedance (输入阻抗)	50Ω Nominal
VSWR (驻波比) @Fc	< 1.2:1
RF connector (射频接头)	SMA-F
Cooling (散热方式)	Conduction-cooled (传导冷却)
Shell material (外壳材料)	Aluminum alloy 6063 (铝6063)

**2. PERFORMANCE vs. WAVELENGTH (性能 vs. 波长)**

Wavelength (光波长) -nm	1064
Bragg angle (布拉格角) -mrad	7.4
Separation angle (分离角) -mrad	14.8

**3. ESTIMATED PERFORMANCE vs. BEAM DIAMETER (预估性能 vs. 光束直径)**


Beam Diameter (光束直径) -mm	1	1.5
Rise time (上升沿时间) -ns	113	170
Diffraction efficiency (衍射效率) @Fc	85%	85%

服务精密制造的先进检测设备供应商 Focus On Advanced Measurements

#### 4. ORDERING CODES (编码规则)

	Fc		Active aperture		Wavelength
Q0001—QL	XXX	—	XXX	—	XXXX
	27.12 MHz	027	040	4 mm	1030 1030 nm
	40.68 MHz	041	060	6 mm	1064 1064 nm
	80 MHz	080	080	8 mm	

#### 5. DIMENSIONS (外形尺寸-mm)

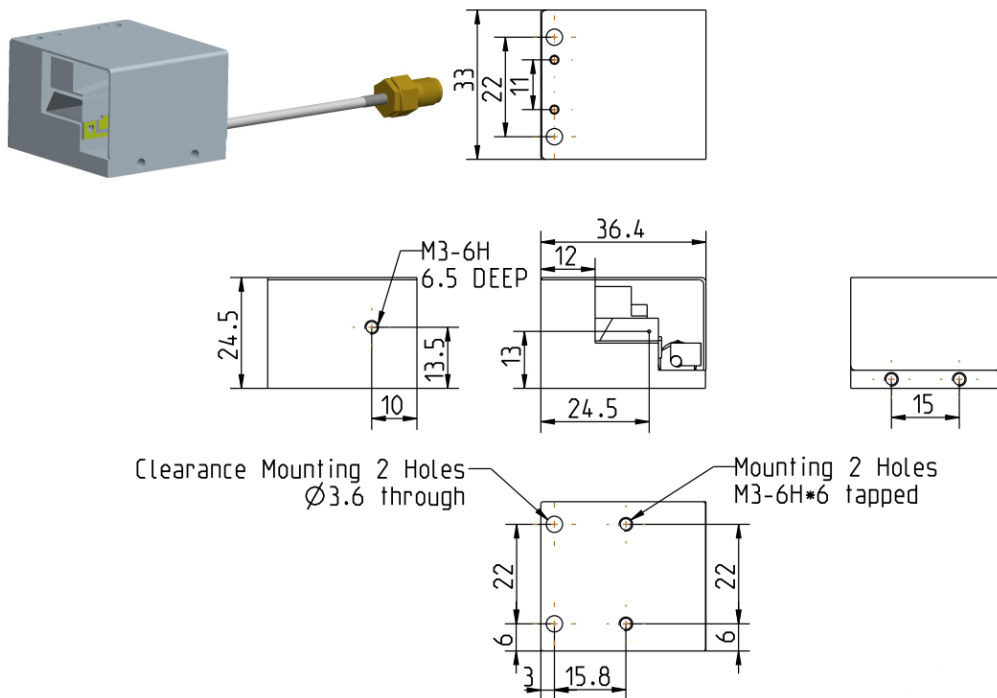

#### 6. SUGGESTED RF DRIVER ELECTRONICS (建议驱动型号)

RD1002-080-24-25-CF

#### 7. REVISION (版本)

Number (版本号)	Revisions date (修订日期)	Revision (修改项目)	Revision description (修订内容说明)
A	2022.6.20	New	/

**Quality Assured:** In house made, high damage threshold, Vacuum bonding, 100% Diffraction efficiency test & burn-in test.

